
0


1

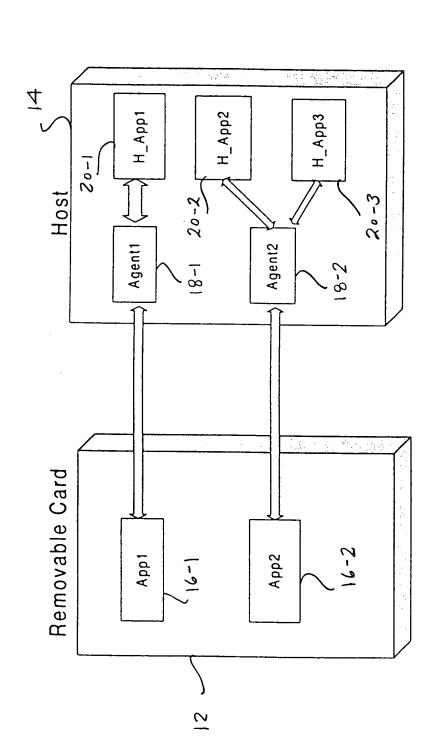

1/3

F16. 1

20

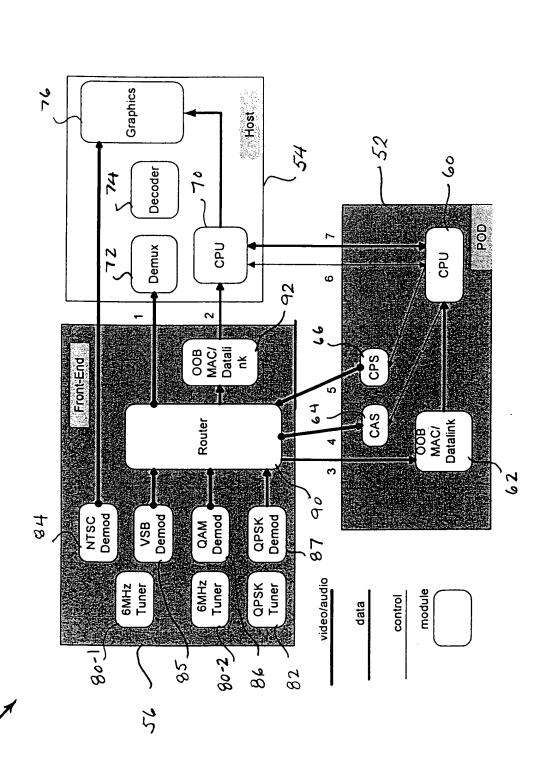

F1G. 2

DOD IS INSERTED INTO HOST. BOTH POD AND HOST GO THROUGH INITIALIZATION 100 PHASE TO SET UP HOST/ POD INTERFACE HOST CREATES TWO TRANSPORT CONNECTIONS 102 OVER COMMAND AND DATA CHANNELS, FOR SENDING TRANSPORT PACKETS OVER THE CHANNELS 104 ر HOST STARTS A SMART AGENT MANAGER APPLICATION SENDS A MESSAGE OVER THE COMMAND 106 CHANNEL TO THE SMAPT AGENT MANAGER, REQUESTING DOWNLOAD OF A SMART AGENT 108 SMART AGENT MANAGER "PULLS" SMART AGENT FROM POD THROUGH DATA CHANNEL, PLACES IT IN HOST MEMORY, AND STARTS IT 110 SMALT AGENT SENDS MESSAGE TO ITS APPLICATION IN THE POD, INDICATING THAT IT IS PEADY TO 112 APPLICATION AND SMART AGENT COMMUNICATE WITH EACH OTHER VIA DATA AND COMMAND CHANNELS

F16.3